
Wire Bundling Tube with Hock Button

Reversible Type Fire Resistant Type: HTN -R Type

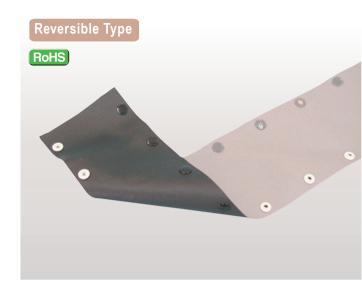

■ Reel Type: Standard Specification

Part Number	Budling Sizeφ(mm)	Sheet Width (mm)	Standard Length(m)	Number of turns
HTN-10R	10	55	50	8
HTN-15R	15	75	50	6
HTN-20R	20	90	50	5
HTN-25R	25	100	50	5
HTN-30R	30	115	50	4
HTN-40R	40	145	50	3
HTN-50R	50	175	50	3

Application

It can be used to bundle the wires around the door and various wiring harnesses and to protect the wires at the panel board and pipes.

Features

- 1) The coloring of both surfaces is grey and black and the surface color of the bundle tube can be selected according to the application. It can be cut freely in the length and it is much economical with lesser loss.
- 2) As the wires can be easily treated for bundling or unbundling, the design change of the wiring and the maintenance can be made freely and the distribution wires can be pulled out from any place.

Material

Sheet: Fire resistant Tarpaulin, 0.3 mm thickness
Polyester cloth impregnated with Tarpaulin resin
Hock button: Polyacetal resin, 50 mm pitch length

Color: Grey and Black reversible

Note: Allowable temperature: Sheet 70°C 、Hock button 70 °C Fire resistant requirement for Vehicle: 13-46K authorized

■ Box Type:Standard Specification

Part Number	Budling Sizeφ (mm)	Sheet Width (mm)	Standard Length(m)
HTN-10RK	10	55	25
HTN-15RK	15	75	25
HTN-20RK	20	90	25
HTN-25RK	25	100	25
HTN-30RK	30	115	25
HTN-40RK	40	145	25
HTN-50RK	50	175	25

Ultra Fire Resistant Type HTZ Type



Material

Sheet: Ultra fire resistant, 0.25 mm thickness Glass cloth impregnated with Silicone varnish Hock button: Polyacetal resin, 50 mm pitch length

Color: Grey

Note: Allowable temperature: Sheet 250 $^{\circ}$ C $_{\searrow}$ Hock button 70 $^{\circ}$ C It can be used for nuclear industry as the wire bundling tube.

■ Reel Type: Standard Specification

Part Number	Budling Sizeφ(mm)	Sheet Width (mm)	Standard Length(m)	Number of turns
HTZ-10	10	55	50	8
HTZ-15	15	75	50	6
HTZ-20	20	90	50	5
HTZ-25	25	100	50	5
HTZ-30	30	115	50	4
HTZ-40	40	145	50	3
HTZ-50	50	175	50	3